

引线尺寸 / Lead dimension(mm)

形状 Style	直引线型 Straight lead type		引线弯曲型 Forming lead type		
Cap 范围 Cap range	100V. DC	333~475	F= 5.0	333~474	564~225
			F= 7.5	333~105	125~225
			F=10.0	564~105	
			F=15.0	125~225	
			F=22.5	275~475	
	250V. DC	102~106	F= 5.0	102~154	184~125
			F= 7.5	102~334	394~155
			F=10.0	184~334	
			F=15.0	394~155	
			F=22.5	185~475	
	400V. DC	102~475	F= 5.0	102~333	393~474
			F= 7.5	102~104	124~474
			F=10.0	394~104	
			F=15.0	124~474	
			F=22.5	564~125	
	450V. DC	102~335	F= 5.0	102~333	393~474
			F= 7.5	102~104	124~474
			F=10.0	393~154	
			F=15.0	184~474	
			F=22.5	564~125	
	630V. DC	102~225	F= 5.0	102~822	103~224
			F= 7.5	102~473	563~224
			F=10.0	103~473	
			F=15.0	563~224	
			F=22.5	274~684	
	1000V. DC	102~474	F=27.5	824~225	
			F=10.0	102~682	
			F=12.5	822~223	273~104
1250V. DC	102~224	F=17.5		124~274	
		F=22.5		334~474	
		F=10.0	102~682		
		F=12.5		822~223	
			F=17.5		273~473
			F=22.5		563~224

编带仕样的引线尺寸 (F)，请参照第27~29的编带尺寸表。
 For a pitch space(F) of the taping specification, refer to "Taping dimensions "on page 27 ~ 29.

外形尺寸/ Dimension(mm)

Cap CODE	Cap (μF)	MMC 100V. DC						标准包装数 Number of pieces for packing unit				
								编带 Taping	直脚品 Long		引线弯曲型 Formed	
		W	H	T	P	F	Φd	Ammo	Bag	Box	Bag	Box
333	0.033	9.5	5.5	3.5	7.5	5.0/7.5	0.5	2,000	200	4,000	200	5,000
393	0.039	"	"	"	"	"	"	"	"	"	"	"
473	0.047	"	"	"	"	"	"	"	"	"	"	"
563	0.056	"	"	"	"	"	"	"	"	"	"	"
683	0.068	"	"	"	"	"	"	"	"	"	"	"
823	0.082	"	"	"	"	"	"	"	"	3,000	"	"
104	0.10	10.0	7.0	3.8	"	"	"	"	"	"	"	4,000
124	0.12	"	7.5	"	"	"	"	"	"	"	"	"
154	0.15	"	8.0	4.0	"	"	"	"	"	2,000	"	"
184	0.18	"	"	4.3	"	"	"	1,000	"	"	"	"
224	0.22	"	"	4.5	"	"	"	"	"	"	"	3,000
274	0.27	"	9.8	"	"	"	"	"	"	"	"	"
334	0.33	"	11.0	"	"	"	"	"	"	"	"	2,000
394	0.39	"	11.5	5.0	"	"	"	"	100	1,500	"	"
474	0.47	"	12.0	5.3	"	"	"	"	"	"	"	"
564	0.56	12.5	10.5	"	10.0	5.0/7.5/10.0	0.6	"	"	1,000	100	1,500
684	0.68	"	"	6.4	"	"	"	500	"	"	"	"
824	0.82	"	13.5	5.7	"	"	"	"	"	"	"	1,000
105	1.0	"	14.0	6.0	"	"	"	"	"	"	"	"
125	1.2	18.0	12.0	5.5	15.0	5.0/7.5/15.0	0.8	"	50	500	"	"
155	1.5	"	13.0	6.0	"	"	"	"	"	"	"	"
185	1.8	"	13.5	6.5	"	"	"	400	"	"	50	500
225	2.2	"	14.0	7.3	"	"	"	"	"	"	"	"
275	2.7	25.0	13.5	6.5	22.5	22.5	"	"	"	250	"	"
335	3.3	"	15.0	7.0	"	"	"	"	"	"	"	"
395	3.9	"	16.0	7.5	"	"	"	"	"	"	"	"
475	4.7	"	17.0	8.0	"	"	"	"	"	"	"	250

外形尺寸/ Dimension(mm)

Cap CODE	Cap (μF)	MMC 250V. DC						标准包装数 Number of pieces for packing unit				
								编带 Taping		直脚品 Long		引线弯曲型 Formed
		W	H	T	P	F	Φd	Ammo	Bag	Box	Bag	Box
102	0.0010	10.3	7.0	4.0	7.5	5.0/7.5	0.6	1,000	200	2,000	200	2,000
122	0.0012	"	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	"	"	"	"	"	"	"	"	"	"
272	0.0027	"	"	"	"	"	"	"	"	"	"	"
332	0.0033	"	"	"	"	"	"	"	"	"	"	"
392	0.0039	"	"	"	"	"	"	"	"	"	"	"
472	0.0047	"	"	"	"	"	"	"	"	"	"	"
562	0.0056	"	"	"	"	"	"	"	"	"	"	"
682	0.0068	"	"	"	"	"	"	"	"	"	"	"
822	0.0082	"	"	"	"	"	"	"	"	"	"	"
103	0.010	"	7.4	4.3	"	"	"	"	"	"	"	"
123	0.012	"	"	4.4	"	"	"	"	"	"	"	"
153	0.015	"	7.5	"	"	"	"	"	"	"	"	"
183	0.018	"	"	"	"	"	"	"	"	"	"	"
223	0.022	"	"	"	"	"	"	"	"	"	"	"
273	0.027	"	"	"	"	"	"	"	"	"	"	"
333	0.033	"	"	"	"	"	"	"	"	"	"	"
393	0.039	"	"	4.5	"	"	"	"	"	"	"	"
473	0.047	"	7.9	4.4	"	"	"	"	"	"	"	"
563	0.056	"	"	4.8	"	"	"	"	"	"	"	"
683	0.068	"	7.5	4.5	"	"	"	"	"	"	"	"
823	0.082	"	8.0	4.8	"	"	"	"	"	"	"	"
104	0.10	"	8.4	5.8	"	"	"	"	"	"	"	"
124	0.12	"	9.0	6.0	"	"	"	"	"	"	"	"
154	0.15	"	10.8	"	"	"	"	"	"	"	"	"
184	0.18	12.5	10.0	5.0	10.0	5.0/7.5/10.0	"	"	100	1,500	100	1,500
224	0.22	"	10.3	5.5	"	"	"	"	"	"	"	"
274	0.27	"	11.0	6.0	"	"	"	"	"	"	"	"
334	0.33	"	11.5	6.5	"	"	"	500	"	"	"	"
394	0.39	18.0	12.0	4.9	15.0	5.0/7.5/15.0	"	"	"	1,000	"	1,000
474	0.47	"	12.5	5.3	"	"	"	"	"	"	"	"
564	0.56	"	13.0	5.5	"	"	"	"	"	500	"	500
684	0.68	"	13.5	6.0	"	"	0.8	"	"	"	"	"
824	0.82	"	14.5	6.5	"	"	"	400	"	"	"	"
105	1.0	"	15.0	7.4	"	"	"	"	"	"	"	"
125	1.2	"	15.9	8.0	"	"	"	"	"	"	"	"
155	1.5	"	16.8	9.0	"	7.5/15.0	"	300	"	"	"	"
185	1.8	25.0	15.5	7.5	22.5	22.5	"	"	50	250	50	250
225	2.2	"	16.3	8.5	"	"	"	"	"	"	"	"
275	2.7	"	17.1	9.4	"	"	"	"	20	200	20	200
335	3.3	"	18.0	10.3	"	"	"	"	"	"	"	"
395	3.9	"	20.5	11.0	"	"	"	"	"	"	"	"
475	4.7	"	21.5	12.0	"	"	"	"	"	"	"	"
565	5.6	30.0	21.0	11.8	27.5	27.5	"	"	"	100	"	100
685	6.8	"	22.4	13.0	"	"	"	"	"	"	"	"
825	8.2	"	23.5	14.3	"	"	"	"	"	"	"	"
106	10.0	"	25.8	15.9	"	"	"	"	"	"	"	"

外形尺寸/ Dimension(mm)

Cap CODE	Cap (μF)	MMC 400V. DC						标准包装数				
								Number of pieces for packing unit				
		W	H	T	P	F	Φd	编带 Taping Ammo	直脚品 Long Bag Box		引线弯曲线 Formed Bag Box	
102	0.0010	10.3	7.0	4.0	7.5	5.0/7.5	0.6	1,000	200	2,000	200	2,000
122	0.0012	"	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	"	"	"	"	"	"	"	"	"	"
272	0.0027	"	"	"	"	"	"	"	"	"	"	"
332	0.0033	"	"	"	"	"	"	"	"	"	"	"
392	0.0039	"	"	"	"	"	"	"	"	"	"	"
472	0.0047	"	"	"	"	"	"	"	"	"	"	"
562	0.0056	"	"	"	"	"	"	"	"	"	"	"
682	0.0068	"	"	"	"	"	"	"	"	"	"	"
822	0.0082	"	"	"	"	"	"	"	"	"	"	"
103	0.010	"	7.6	4.4	"	"	"	"	"	"	"	"
123	0.012	"	7.8	"	"	"	"	"	"	"	"	"
153	0.015	"	"	"	"	"	"	"	"	"	"	"
183	0.018	"	7.6	"	"	"	"	"	"	"	"	"
223	0.022	"	7.9	4.5	"	"	"	"	"	"	"	"
273	0.027	"	8.2	4.8	"	"	"	"	"	"	"	"
333	0.033	"	9.0	5.5	"	"	"	"	"	"	"	"
393	0.039	12.5	8.0	4.9	10.0	5.0/7.5/10.0	"	"	"	1,600	"	1,600
473	0.047	"	8.3	5.2	"	"	"	"	"	"	"	"
563	0.056	"	10.0	"	"	"	"	"	"	"	"	"
683	0.068	"	10.5	5.5	"	"	"	"	100	1,500	100	1,500
823	0.082	"	11.0	6.0	"	"	"	"	"	"	"	"
104	0.10	"	12.0	"	"	"	"	"	"	1,000	"	1,000
124	0.12	18.0	10.2	5.5	15.0	5.0/7.5/15.0	"	500	"	"	"	"
154	0.15	"	12.0	"	"	"	"	"	"	"	"	"
184	0.18	"	12.5	6.0	"	"	"	"	"	"	"	"
224	0.22	"	13.0	6.5	"	"	"	400	"	500	"	500
274	0.27	"	13.5	7.0	"	"	0.8	"	"	"	"	"
334	0.33	"	14.0	7.7	"	"	"	300	"	"	"	"
394	0.39	"	15.0	8.5	"	"	"	"	50	"	50	"
474	0.47	"	16.5	"	"	"	"	"	"	"	"	"
564	0.56	25.0	15.3	7.5	22.5	22.5	"	"	"	250	"	250
684	0.68	"	16.0	8.2	"	"	"	"	"	"	"	"
824	0.82	"	16.8	9.0	"	"	"	"	"	"	"	"
105	1.0	"	17.7	10.0	"	"	"	"	"	200	"	200
125	1.2	"	18.8	11.0	"	"	"	"	"	"	"	"
155	1.5	30.0	19.5	10.0	27.5	27.5	"	"	25	150	"	"
185	1.8	"	18.7	9.3	"	"	"	"	20	100	20	100
225	2.2	"	19.8	10.4	"	"	"	"	"	"	"	"
275	2.7	"	21.0	11.6	"	"	"	"	"	"	"	"
335	3.3	"	22.3	13.0	"	"	"	"	"	"	"	"
395	3.9	"	23.6	14.2	"	"	"	"	"	"	"	"
475	4.7	"	25.5	15.8	"	"	"	"	"	"	"	"

外形尺寸/ Dimension(mm)

Cap CODE	Cap (μF)	MMC 450V. DC						标准包装数 Number of pieces for packing unit				
								编带 Taping		直脚品 Long		引线弯曲型 Formed
		W	H	T	P	F	Φd	Ammo	Bag	Box	Bag	Box
102	0.0010	10.3	7.0	4.0	7.5	5.0/7.5	0.6	1,000	200	2,000	200	2,000
122	0.0012	"	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	"	"	"	"	"	"	"	"	"	"
272	0.0027	"	"	"	"	"	"	"	"	"	"	"
332	0.0033	"	"	"	"	"	"	"	"	"	"	"
392	0.0039	"	"	"	"	"	"	"	"	"	"	"
472	0.0047	"	"	"	"	"	"	"	"	"	"	"
562	0.0056	"	"	"	"	"	"	"	"	"	"	"
682	0.0068	"	"	"	"	"	"	"	"	"	"	"
822	0.0082	"	"	"	"	"	"	"	"	"	"	"
103	0.010	"	7.6	4.4	"	"	"	"	"	"	"	"
123	0.012	"	7.8	"	"	"	"	"	"	"	"	"
153	0.015	"	"	"	"	"	"	"	"	"	"	"
183	0.018	"	7.6	"	"	"	"	"	"	"	"	"
223	0.022	"	7.9	4.5	"	"	"	"	"	"	"	"
273	0.027	"	8.2	4.8	"	"	"	"	"	"	"	"
333	0.033	"	9.0	5.5	"	"	"	"	"	"	"	"
393	0.039	12.5	8.0	4.9	10.0	5.0/7.5/10.0	"	"	"	1,600	"	1,600
473	0.047	"	8.3	5.2	"	"	"	"	"	"	"	"
563	0.056	"	10.0	"	"	"	"	"	"	"	"	"
683	0.068	"	10.5	5.5	"	"	"	"	100	1,500	100	1,500
823	0.082	"	11.0	6.0	"	"	"	"	"	"	"	"
104	0.10	"	12.0	"	"	"	"	"	"	1,000	"	1,000
124	0.12	18.0	10.2	5.5	15.0	"	"	500	"	"	"	"
154	0.15	"	12.0	"	"	"	"	"	"	"	"	"
184	0.18	"	12.5	6.0	"	"	"	"	"	"	"	"
224	0.22	"	13.0	6.5	"	"	"	400	"	500	"	500
274	0.27	"	13.5	7.0	"	"	0.8	"	"	"	"	"
334	0.33	"	14.0	7.7	"	"	"	300	"	"	"	"
394	0.39	"	15.0	8.5	"	"	"	"	50	"	50	"
474	0.47	"	16.5	"	"	"	"	"	"	"	"	"
564	0.56	25.0	15.3	7.5	22.5	22.5	"	"	"	250	"	250
684	0.68	"	16.0	8.2	"	"	"	"	"	"	"	"
824	0.82	"	16.8	9.0	"	"	"	"	"	"	"	"
105	1.0	"	17.7	10.0	"	"	"	"	"	200	"	200
125	1.2	"	18.8	11.0	"	"	"	"	"	"	"	"
155	1.5	30.0	19.5	10.0	27.5	27.5	"	"	25	150	"	"
185	1.8	"	21.5	11.0	"	"	"	"	20	100	"	"
225	2.2	"	23.0	12.5	"	"	"	"	"	"	20	100
275	2.7	"	25.0	14.0	"	"	"	"	"	"	"	"
335	3.3	"	26.5	15.5	"	"	"	"	"	"	"	"

外形尺寸/ Dimension(mm)

Cap CODE	Cap (μF)	MMC 630V. DC						标准包装数				
								Number of pieces for packing unit				
		W	H	T	P	F	Φd	编带 Taping Ammo	直脚品 Long Bag Box		引线弯曲线 Formed Bag Box	
102	0.0010	10.3	7.5	4.5	7.5	5.0/7.5	0.6	1,000	200	2,000	200	2,000
122	0.0012	"	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	"	"	"	"	"	"	"	"	"	"
272	0.0027	"	"	"	"	"	"	"	"	"	"	"
332	0.0033	"	"	"	"	"	"	"	"	"	"	"
392	0.0039	"	"	"	"	"	"	"	"	"	"	"
472	0.0047	"	"	"	"	"	"	"	"	"	"	"
562	0.0056	"	"	"	"	"	"	"	"	"	"	"
682	0.0068	"	"	"	"	"	"	"	"	"	"	"
822	0.0082	"	"	"	"	"	"	"	"	"	"	"
103	0.010	12.5	"	4.0	10.0	5.0/7.5/10.0	"	"	"	"	"	"
123	0.012	"	"	4.5	"	"	"	"	"	"	"	"
153	0.015	"	8.2	5.0	"	"	"	"	"	"	"	"
183	0.018	"	10.0	"	"	"	"	"	"	"	"	"
223	0.022	"	10.5	5.3	"	"	"	"	"	1,600	"	1,600
273	0.027	"	"	5.5	"	"	"	"	"	"	"	"
333	0.033	"	11.0	6.0	"	"	"	"	100	1,500	100	1,500
393	0.039	"	12.5	"	"	"	"	"	"	"	"	"
473	0.047	"	13.0	6.5	"	"	"	500	"	1,000	"	1,000
563	0.056	18.0	10.5	5.5	15.0	5.0/7.5/15.0	"	"	"	"	"	"
683	0.068	"	11.0	6.0	"	"	"	"	"	"	"	"
823	0.082	"	11.5	6.5	"	"	"	400	"	"	"	"
104	0.10	"	13.0	"	"	"	"	"	"	500	"	500
124	0.12	"	13.5	7.0	"	"	0.8	"	50	"	50	"
154	0.15	"	14.5	8.0	"	"	"	300	"	"	"	"
184	0.18	"	16.0	"	"	"	"	"	"	"	"	"
224	0.22	"	16.5	9.0	"	"	"	"	"	"	"	250
274	0.27	25.0	16.8	7.5	22.5	22.5	"	"	"	250	"	"
334	0.33	"	17.5	8.0	"	"	"	"	"	"	"	"
394	0.39	"	18.0	8.7	"	"	"	"	"	150	"	150
474	0.47	"	19.0	9.5	"	"	"	"	"	"	"	"
564	0.56	"	20.0	10.5	"	"	"	"	"	"	"	"
684	0.68	"	21.5	11.5	"	"	"	"	"	"	"	"
824	0.82	30.0	20.0	10.5	27.5	27.5	"	"	20	100	20	100
105	1.0	"	21.0	11.5	"	"	"	"	"	"	"	"
125	1.2	"	22.0	12.5	"	"	"	"	"	"	"	"
155	1.5	"	24.0	14.3	"	"	"	"	"	"	"	"
185	1.8	"	25.5	15.5	"	"	"	"	"	80	"	"
225	2.2	"	27.3	17.5	"	"	"	"	"	"	"	"

外形尺寸/ Dimension(mm)


Cap CODE	Cap (μF)	MMC 1000V. DC						标准包装数 Number of pieces for packing unit			
		W	H	T	P	F	Φd	直脚品 Long		引线弯曲型 Formed	
								Bag	Box	Bag	Box
102	0.0010	15.5	11.0	6.0	12.5	10.0	0.6	100	1,500	100	1,500
122	0.0012	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	11.5	"	"	"	"	"	"	"	"
272	0.0027	"	12.0	6.5	"	"	"	"	"	"	"
332	0.0033	"	11.5	6.0	"	"	"	"	1,000	"	1,000
392	0.0039	"	12.0	6.5	"	"	"	"	"	"	"
472	0.0047	"	12.5	7.0	"	"	"	"	"	"	"
562	0.0056	"	13.0	7.5	"	"	"	"	"	"	"
682	0.0068	"	11.0	6.0	"	"	"	"	"	"	"
822	0.0082	"	"	"	"	12.5	"	"	"	"	"
103	0.010	"	"	"	"	"	"	"	"	"	"
123	0.012	"	12.0	"	"	"	"	"	"	"	"
153	0.015	"	12.5	7.0	"	"	"	"	"	"	"
183	0.018	"	13.0	7.5	"	"	0.8	"	"	"	"
223	0.022	"	15.5	"	"	"	"	"	"	"	"
273	0.027	21.0	13.0	6.0	17.5	"	"	50	500	50	500
333	0.033	"	14.0	6.5	"	"	"	"	"	"	"
393	0.039	"	14.5	7.0	"	"	"	"	"	"	"
473	0.047	"	15.5	7.5	"	"	"	"	300	"	300
563	0.056	"	17.0	"	"	"	"	"	"	"	"
683	0.068	"	18.0	8.5	"	"	"	"	"	"	"
823	0.082	"	18.5	9.0	"	"	"	"	"	"	"
104	0.10	"	20.0	10.0	"	"	"	"	"	"	"
124	0.12	26.0	18.5	9.0	22.5	17.5	"	"	250	"	250
154	0.15	"	20.0	10.0	"	"	"	"	"	"	"
184	0.18	"	22.0	10.5	"	"	"	"	150	"	150
224	0.22	"	23.0	12.0	"	"	"	"	"	"	"
274	0.27	"	25.0	13.5	"	"	"	25	"	25	"
334	0.33	31.0	24.0	13.0	27.5	22.5	"	20	100	20	"
394	0.39	"	26.0	14.0	"	"	"	"	"	"	"
474	0.47	"	27.5	15.5	"	"	"	"	"	"	"

外形尺寸 / Dimension(mm)

Cap CODE	Cap (μ F)	MMC 1250V. DC						标准包装数 Number of pieces for packing unit			
		W	H	T	P	F	Φd	直脚品 Long		引线弯曲型 Formed	
								Bag	Box	Bag	Box
102	0.0010	15.5	11.0	6.0	12.5	10.0	0.6	100	1,500	100	1,500
122	0.0012	"	"	"	"	"	"	"	"	"	"
152	0.0015	"	"	"	"	"	"	"	"	"	"
182	0.0018	"	"	"	"	"	"	"	"	"	"
222	0.0022	"	11.5	"	"	"	"	"	"	"	"
272	0.0027	"	12.0	6.5	"	"	"	"	"	"	"
332	0.0033	"	11.5	6.0	"	"	"	"	1,000	"	1,000
392	0.0039	"	12.0	6.5	"	"	"	"	"	"	"
472	0.0047	"	12.5	7.0	"	"	"	"	"	"	"
562	0.0056	"	13.0	7.5	"	"	"	"	"	"	"
682	0.0068	"	15.0	"	"	"	"	"	"	"	"
822	0.0082	21.0	12.0	5.0	17.5	12.5	"	"	500	"	500
103	0.010	"	12.5	"	"	"	"	"	"	"	"
123	0.012	"	13.0	5.5	"	"	"	"	"	"	"
153	0.015	"	13.5	6.0	"	"	"	"	"	"	"
183	0.018	"	14.5	6.5	"	"	0.8	"	"	"	"
223	0.022	"	15.0	7.0	"	"	"	50	250	50	250
273	0.027	26.0	15.5	6.0	22.5	17.5	"	"	"	"	"
333	0.033	"	16.0	6.5	"	"	"	"	"	"	"
393	0.039	"	16.5	7.0	"	"	"	"	"	"	"
473	0.047	"	17.0	8.0	"	"	"	"	"	"	"
563	0.056	31.0	"	7.5	27.5	22.5	"	"	"	"	"
683	0.068	"	17.5	8.0	"	"	"	"	"	"	"
823	0.082	"	18.5	9.0	"	"	"	"	150	"	150
104	0.10	"	19.5	10.0	"	"	"	"	"	"	"
124	0.12	"	20.5	11.5	"	"	"	"	"	"	"
154	0.15	"	23.0	12.0	"	"	"	"	"	"	"
184	0.18	"	24.5	13.0	"	"	"	"	"	"	"
224	0.22	"	26.5	14.5	"	"	"	25	100	25	"


相对频率数允许的电流特性 / Characteristics of permissible current to frequency

MMC 1250V

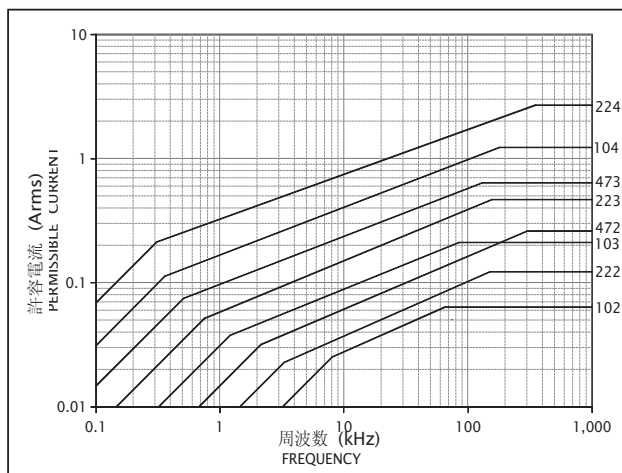


相对频率数允许的电流特性 / Characteristics of permissible current to frequency


MMC 100V

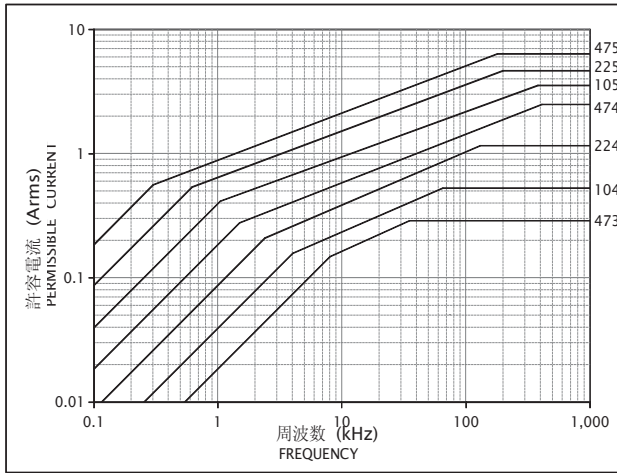


MMC 250V

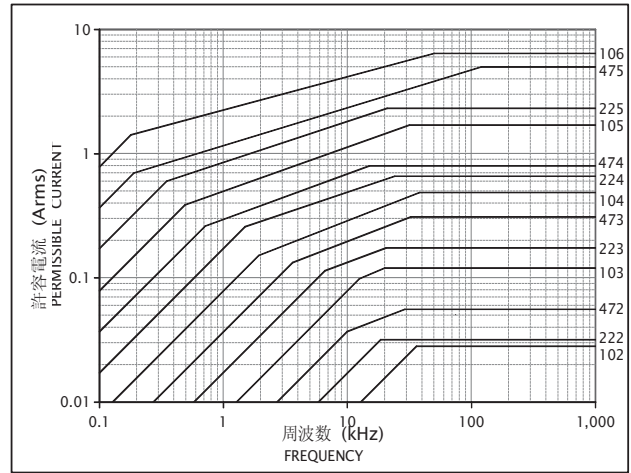


MMC 400V

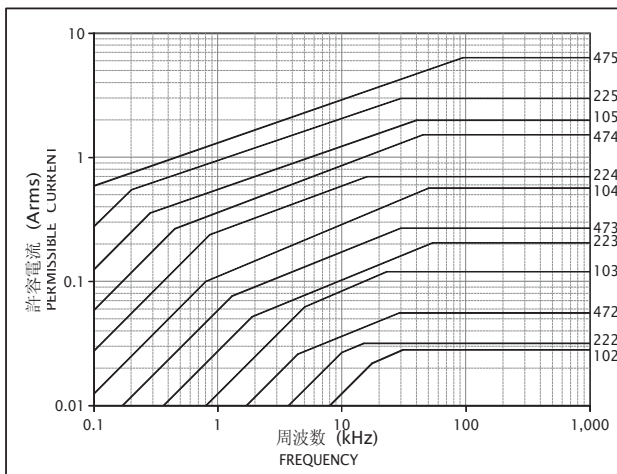

MMC 450V

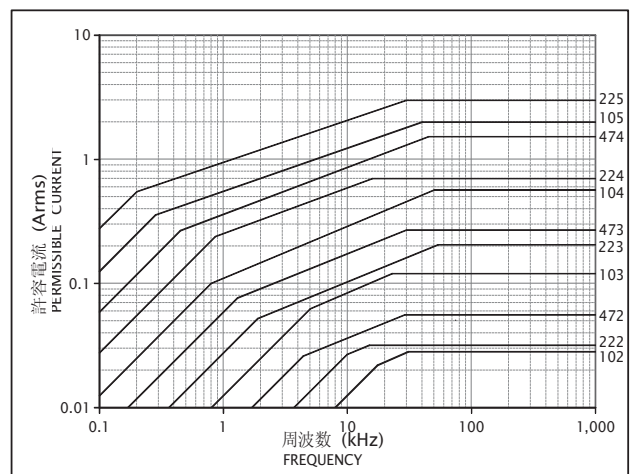

MMC 630V

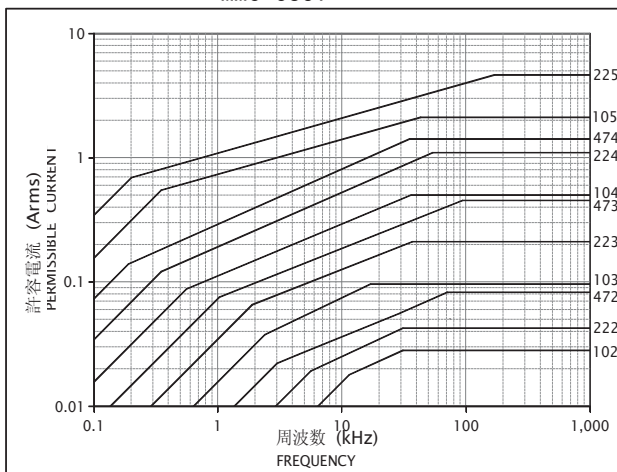

MMC 1000V

