

② 引线形状 Lead configuration code		⑥ 引线形状尺寸/包装形式*2 Lead dimension / Packaging mode code*2			
编码 code	引线加工形状 Lead configuration	记号示例 Typical code samples		记号说明 Description	
※1	直引线型 Straight leads	0000		直引线 (散包装品) 代码为0000。 No lead processing and always in bulk (0000)	
C	直引线切断型 Short leads	0050		引线切断品、分各种长度、尺寸编号设定、标准品为5mm 尺寸编码0050。 Lead length multiplied by 10. Always in bulk.	
F	成形 Formed (leads)	F 尺寸(mm) Lead spacing	编码 Code	F 尺寸(mm) Lead spacing	编码 Code
		5.0	0050	17.5	0175
		7.5	0075	20.0	0200
		10.0	0100	22.5	0225
		12.5	0125	25.0	0250
		15.0	0150	27.5	0275
F 表示引线成型后的引线间距。 引线成型(袋装品) Lead spacing (F) after forming indicated as multiplied by 10. Always in bulk.					
S	自动插入用竖型编带 (直引线型) Lead taping for automatic insertion machine (Straight leads)	形状 Style	编码 Code	表示直引线型和成形的编带品。(弯折后盒包装) 详细请阅读5~6页自动插入用编带规格。	
	1	0200*3			
V	自动插入用竖型编带 (引线成型型) Lead taping for automatic insertion machine (Formed leads)	1	0200	Straight leads · Formed leads taped and ammo packed. See page 5-6.	
		2	D200		
		3	D210		
		4	D220		
		5	0200		
6	0200				
	自动安装用编带 Taping for automatic mounting machine	0400		表示贴片形的编带形状。详细请阅读7页自动安装用编带规格。 Chip type taping. See page 7.	

※1 直引线时，编码为空格。

※2 根据型号的不同，引线形状的尺寸记号有所不同，在订单时请确认。

The blank square signifies a straight leads type.

Some types could bear different lead dimension codes, to be confirmed each case.

※3 AMZ品名中的编码为“C220”。

AMZ type shall be "C220".

③ 额定电压/Rated voltage (V. dc, V. ac)

V/Voltage	16	35	50	63	100	125	220	250	400	450	630	800	1000	1250	1600
编码/Code	0016	0035	0050	0063	0100	0125	0220	0250	0400	0450	0630	0800	1000	1250	1600

④ 标准容量偏差/Capacitance tolerance code

编码/Code	F	G	H	J	K	M
许容差(%) / Tolerance (%)	±1	±2	±3	±5	±10	±20

⑤ 标称容量

单位pF用3位数字表示。

开始2位：标称容量有效数字
第3位：有效数字后零的个数

⑤ Capacitance code

Capacitance (pF) expressed in 3-digit code.


The first two digits: Significant figures of capacitance value.

The third digit: The number of zeros to follow the significant figures.

示例 Cording sample


1) AMZ 50V 0.10μF ±5% 成形品，编带弯折后盒包装的订单

Coding of: AMZ 50V 0.10μF ±5%, formed, taped and ammo-packed

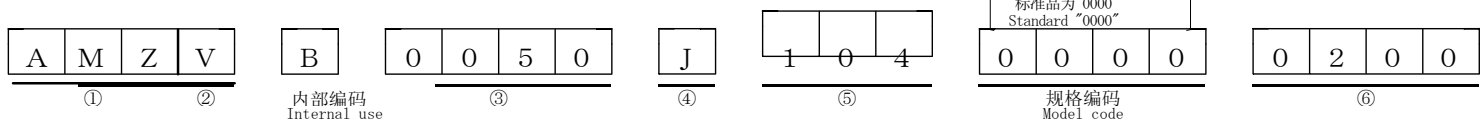

2) MMC 250V 1.0μF ±10% 成形品，加工尺寸为15.0mm的散装品的订单

Coding of: MMC 250V 1.0μF ±10%, formed with 15.0mm leads, in bulk

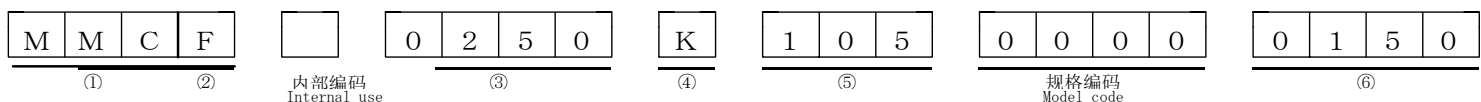

3) MMT 50V 0.1μF ±5% 直引线的订单 (散装品)

Coding of: MMT 50V 0.1μF ±5%, straight lead (in bulk)

